



HYDRAL-CURE[®] CARTRIDGE TANK FILTERS

SEDIMENT

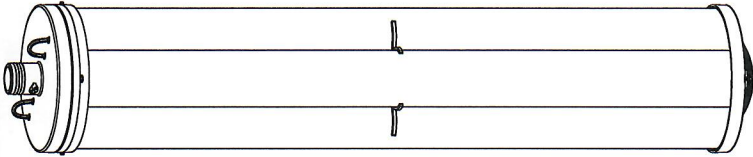

The four filter posts give an additional 56% more filtration surface area than an equivalent 30" length solid meltblown filter.

CTO SEDIMENT/CARBON

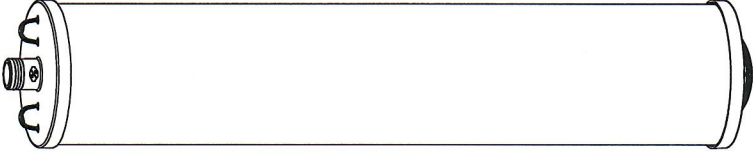


These filters are an economical way to remove sediment, chlorine taste and odor.

Order Number	Description
C3400-MB2501	CT Sediment Filter MB 25/01 MIC
C3400-MB2505	CT Sediment Filter MB 25/05 MIC
C3400-MB5005	CT Sediment Filter MB 50/05 MIC

Order Number	Description
C3400-CTO5	CT CTO Sediment/Carbon 50/05 MIC
C3400-CTO20	CT CTO Sediment/Carbon 50/20 MIC

CARTRIDGE TANK INSTALLATION GUIDE

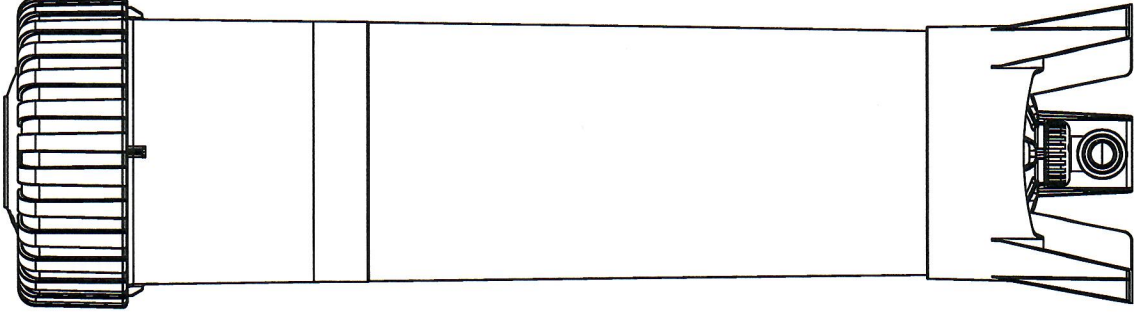

ORDER NUMBER: C3100C


**WARNING: USE ONLY SILICONE-BASED LUBRICANTS
ON ALL CLACK CORPORATION COMPONENTS**

HYDROCARBONS WILL DAMAGE COMPONENTS THAT CONTAIN O-RINGS AND OR PLASTIC. THIS CAN CAUSE LEAKS OR BREAKAGE. DO NOT USE LUBRICANTS THAT CONTAIN HYDROCARBONS SUCH AS VASELINE®/ PETROLEUM JELLY, WD-40®, ETC. DO NOT USE CLACK CONTROL VALVE PRODUCTS ON WATER SUPPLIES THAT CONTAIN HYDROCARBONS, SUCH AS BENZENE, GASOLINE, KEROSENE, ETC.

OPERATION

Maximum Pressure: 125 PSI • Maximum Temperature: 110°F

DIMENSIONS

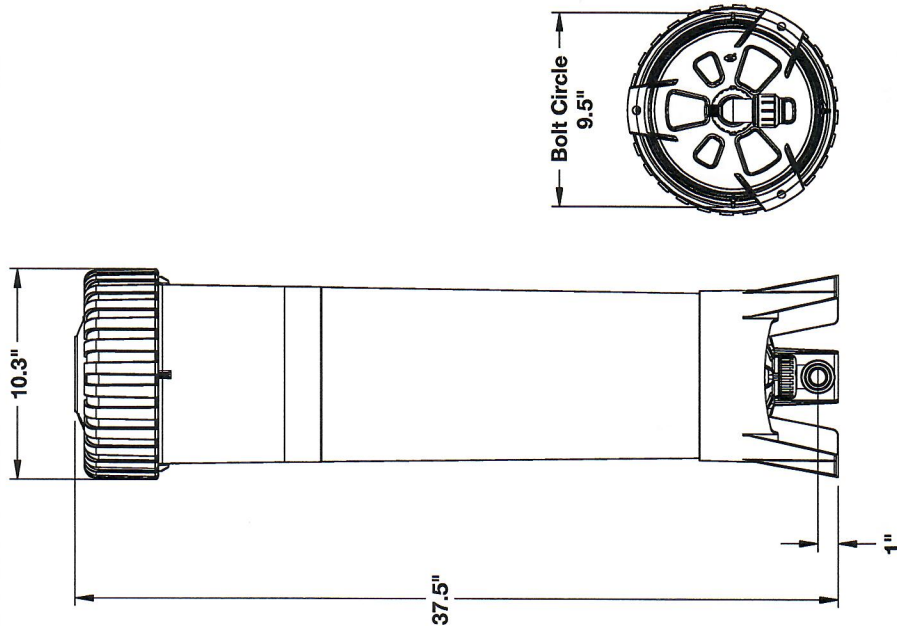

PARTS

Cartridge Tank Parts

Drawing Number	Order Number	Description	Qty.
1	C3001	CT Nut	1
2	C3002	CT Cap 2.5 NPSM	1
3	C3022	O-Ring 370	1
4	C3004	CT 1.320 Center Adapter	1
5	C3000	CT Housing Body	1
6	V3003	CT Tank Base	1
7	V3007-15*	WS1 Fitting JG QC 90 Asy.	1

* includes two fittings

Optional Parts - Sold Separately

Drawing Number	Order Number	Description	Qty.
8	V3006	WS1 Bypass Assembly	1
9	V3007-21	Vertical 90 Union Adapter Kit	1
10	D1400-04	1191 1.320 Short Riser Pilot	1
11	See back page for Filters		1

